






## Declaration of Performance GTXF20NW300

AoC System 2+ The notified body NB 1020, performed the initial inspection of the company's manufacturing plant in Kanapitsa, 35200, Atalanti, Greece and of factory production control and the continuous surveillance, assessment and evaluation of factory production control and issued the certificate of conformity of the factory production control.

## **BONDEX 300**

## UV stabilized virgin polypropylene needle punched non woven geotextile

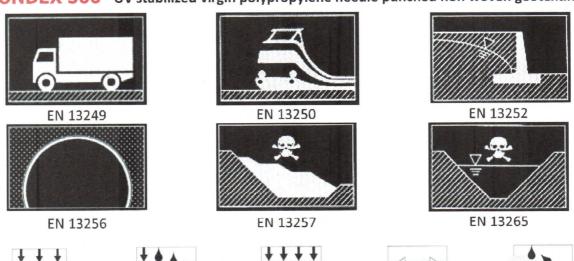

8 F		K		
Essential characteristics	Harmonized technical specification	Performance	Unit of measurement	Tolerance
Mass per unit area	EN 9864	300	gr/m²	± 30
Thickness at 2 kPa	EN ISO 9863-1	2.2	mm	± 1.0
Thickness at 20 kPa	EN ISO 9863-1	1.8	mm	± 1.0
Tensile Strength MD	EN 10319	16.0	kN/m	- 2.0
Elongation MD	EN 10319	65	%	± 15
Tensile Strength CMD	EN 10319	15.0	kN/m	- 2.0
Elongation CMD	EN 10319	55	%	± 15
Static Puncture Test (CBR)	EN 12236	3,100	N	- 330
Dynamic Perforation Resistance(cone drop)	EN ISO 13433	18	mm	+ 6
Characteristic Opening Size O <sub>90</sub>	EN ISO 12956	50	μm	± 20
Water permeability normal to the plane (Velocity Index, 20°C)	EN ISO 11058	75	m/s*10 <sup>-3</sup>	- 20
Durability	EN 13438	To be covered on the day of installation. <sup>1</sup> Predicted durability for at least 25 years in natural soils with		

• The values contained herein are average based on laboratory results with the above declared tolerances with a 95% confidence limit. •¹In accordance with Annex B of the harmonised standards. • The non woven geotextile is packaged in rolls that carry a dark wrap for protection from the sun's rays. • It is the responsibility of all users to satisfy themselves that the above date are current. The geotextiles listed are CE marked and they come along with a CE certificate and installation manual upon a customer request. • This declaration of performance is issued under the sole responsibility of the producer Fibralco S.A. • The performance of the product identified above is in conformity with the set of declared performance/s in accordance with Regulation (EU) No 305/2011.



4<pH <9 and soil temperatures of 25°C



QUALITY ASSURANCE SYSTEM